

NEMA HP5 (Types L & LL)

Cross-Linked Modified Polyethylene

600V & 1000V, 125°C

APPLICATION

This irradiated polyolefin insulated wire has outstanding flame retardant and high temperature characteristics. It combines excellent thermal stability and high electrical values to provide a superior, small diameter, electronic hook-up wire. The wire passes the difficult VW-1 fire test, has thermoset mechanical characteristics, and very low levels of corrosive content. The wires offer a cost effective alternative to the more expensive fluoropolymers such as PTFE and ETFE.


CONDUCTOR

Soft annealed tin plated copper, stranded as listed below.

INSULATION

Extruded layer of irradiation cross-linked polyolefin meeting the requirements of specifications DDA 1066.

Reference: MIL-DTL-16878/14 & 15

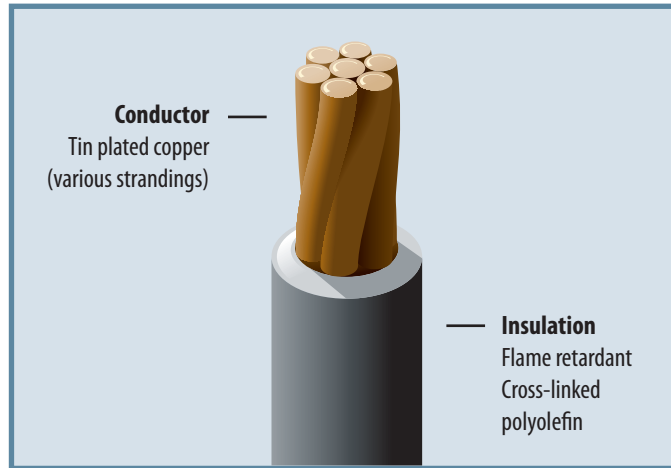

Part Number	Conductor				Conductor Resistance @20°C		Max. Diameter		Weight	
	Size		Strand-ing	Mat-erial	Ω/kft	Ω/km	Inch	mm	lbs/kft	kg/km
	AWG	mm ²								
HP-5 TYPE L, 600V										
HP5L-BDB-X	26	.14	7/34	TC	43.4	142	.041	1.04	1.5	2.23
HP5L-BEB-X	24	.23	7/32		27.0	88.6	.047	1.19	2.1	3.12
HP5L-BEE-X	24	.24	19/36		26.2	86.0	.047	1.19	2.1	3.12
HP5L-BFB-X	22	.35	7/30		17.1	56.1	.053	1.35	3.1	4.61
HP5L-BFE-X	22	.38	19/34		16.2	53.2	.053	1.35	3.1	4.61
HP5L-BGE-X	20	.62	19/32		9.88	32.4	.061	1.55	4.7	6.99
HP5L-BHE-X	18	.96	19/30		6.23	20.4	.071	1.80	7.1	10.5
HP5L-BJE-X	16	1.23	19/29		4.81	15.8	.081	2.06	9.3	13.8
HP5L-BKE-X	14	1.94	19/27		3.06	10.0	.096	2.44	14.1	21
HP-5 TYPE LL, 1000V										
HP5LL-BDB-X	26	.14	7/34	TC	43.4	142	.057	1.45	2.0	2.98
HP5LL-BEB-X	24	.23	7/32		27.0	88.6	.062	1.57	2.7	4.02
HP5LL-BEE-X	24	.24	19/36		26.2	86.0	.062	1.57	2.7	4.02
HP5LL-BFB-X	22	.35	7/30		17.1	56.1	.068	1.73	3.7	5.51
HP5LL-BFE-X	22	.38	19/34		16.2	53.2	.068	1.73	3.8	5.65
HP5LL-BGE-X	20	.62	19/32		9.88	32.4	.076	1.93	5.5	8.18
HP5LL-BHE-X	18	.96	19/30		6.23	20.4	.086	2.18	7.9	11.7
HP5LL-BJE-X	16	1.23	19/29		4.81	15.8	.095	2.41	9.7	14.4
HP5LL-BKE-X	14	1.94	19/27		3.06	10.0	.110	2.79	15.8	23
HP5LL-BLE-X	12	3.08	19/25	1.92	6.30	.131	3.33	24.1	36	

X = color. See page 67 for color designator.

The above part numbers represent the more popular constructions. However, other designs are available upon request.

All products are manufactured to meet RoHS compliance. For exceptions, please contact our sales department.

APPROVALS AND RATINGS

NEMA HP-5 Type L – MIL-DTL-16878/14
125°C conductor temperature,
600 volt, VW-1

NEMA HP-5 Type LL – MIL-DTL-16878/15
125°C conductor temperature,
1000 volt, VW-1